

L04-L290 (5-400 HP) FIXED-SPEED ROTARY SCREW COMPRESSORS





Advanced Technology Inspired Simplicity

A Better Approach

Gardner Denver has a long history of manufacturing compressed air equipment. With our L-Series line of products, we have uniquely combined simplicity with cutting edge design. The result—a compressor that delivers outstanding performance with unprecedented serviceability.

The Total Package

Gardner Denver has the total package—extensive compressor and air treatment product lines, sales and service support through our extensive network of authorized local distributors, and industry leading warranty programs. Because we offer more than just compressed air equipment, we can provide solutions that keep you running, protect your production objectives, and save you money.



Expect More? Choose Gardner Denver



GARDNER DENVER-TAKING QUIET TO A WHOLE NEW LEVEL

Without sacrificing serviceability, the L-Series compressor packages feature some of the **Smallest footprints** in the industry.




Small Footprint = Cost Savings

Compact, Quiet Compressors

Nearly Silent Noise Levels

The Gardner Denver L-Series compressor designs feature high-quality, sound-insulating enclosure panels and a low-noise, thermostatically-controlled, motor-driven fan. These components reduce the noise to whisper-quiet levels and eliminate the need for a separate compressor room, saving money on installation costs.

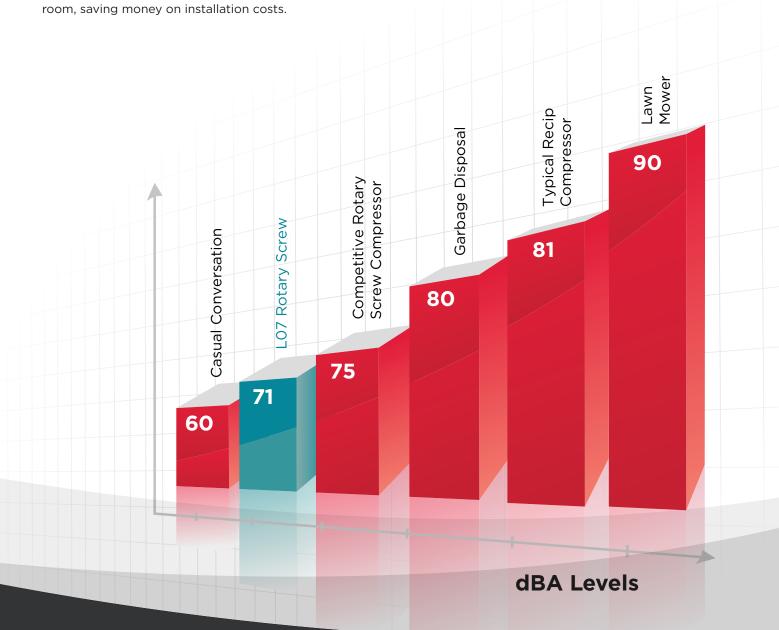

Stay Focused on What Is Important

Compressors are more than just a financial investment. They are a key component in ensuring that you, as a manufacturer, processor and operator, receive consistent, high-quality low-cost air. Gardner Denver uses the latest design techniques to develop a compressor that focuses on the three most important aspects of a compressor.

Reliability. Performance. Value.





As a member of the Compressed Air and Gas Institute's performance verification program, you can rest assured that the performance numbers that Gardner Denver publishes are consistent with the actual performance of our machines. Gardner Denver compressors, just as all lubricated rotary screw compressors 5 HP and above, are third-party tested to ensure that our performance numbers are accurate, easy-to-understand and verified.



Gardner Denver — Exceeding Your Expectations

Get in Touch with the Next Generation of Compressor Controllers

State-of-the-Art

Gardner Denver completes it's industry leading compressor packages with the state-of-the-art dual position GD Pilot controller. Featuring advanced software and an easy to use interface, the GD Pilot controller provides and displays an extensive amount of data on the operation of your compressor.

GD Pilot Controller Features

- Real time clock
- Second pressure setting
- Discharge/line/network pressure data displayed
- Advanced fault history log
- Programmable inputs and outputs
- Auto restart after power failure
- RS485-Modbus RTU standard





GD Pilot TS Controller Features

- Real time clock
- Second pressure setting
- Touch screen
- Discharge/line/network pressure data displayed
- Advanced fault history log
- Programmable inputs and outputs
- Auto restart after power failure
- RS485-Modbus RTU standard
- SD card for data logging
- Optional baseload sequencing to control multiple machines

Keeping the System Healthy

Ensure your compressed air system remains a total package

Total System Protection

Since 1859, Gardner Denver has been supporting the compressed air industry with high quality, long-lasting compressor and air treatment solutions. Carrying on that legacy, our robust line of parts, lubricant and downstream accessories ensure your system stays healthy.

The focus on total system protection by Gardner Denver not only includes OEM parts and fluid solutions, but a commitment to the longevity of your equipment through our industry leading warranty programs.

Protect your investment.

Sales & Service Distributors Across America

An Extensive Network

By leveraging the extensive network of Gardner Denver factory-trained authorized local distributors, your sales, service, and technical support needs can be handled quickly and easily.

Best Warranty in the Industry

Experience Peace of Mind

The engineering philosophy of Gardner Denver ensures long-lasting, reliable equipment. Our simple, but bold warranty programs demonstrate our belief in the quality found in Gardner Denver compressors.

Our standard warranty ensures that you have peace of mind when it comes to your system's operation. For added protection, take advantage of our 10-year extended airend warranty program. Simply stated, it's the best in the industry.



To find a distributor visit: gardnerdenver.com/gdproduct: Denver

L04-L290 ROTARY SCREW COMPRESSOR

MODEL	DRIVE MOTOR		50 HZ				60 HZ							
			NOMINAL FAD ¹ PRESSURE FAD ¹			D1	NOMINAL PRESSURE		FAD'		NOISE WEIGHT		IGHT	DIMENSIONS L × W × H
	HP	KW	PSIG	BAR	ACFM	M³/MIN	PSIG	BAR	ACFM	M³/MIN	DB(A)	LBS	KG	IN. (MM)
L04	5	4	NA	NA	NA	NA	100 125 190	6.9 8.6 13.0	19.4 18.2 12.9	0.55 0.52 0.36	68	373	169	27 × 25 × 41 (686 × 635 × 1041)
L05	7.5	5	NA	NA	NA	NA	100 125 190	6.9 8.6 13.0	28.4 24.9 18.3	0.8 0.71 0.52		373	тоа	
L07	10	7	110 145 190	7.5 10.0 13.0	45.9 37.4 30.0	1.30 1.06 0.85	100 125 190	6.9 8.6 13.0	44.5 38.7 26.4	1.26 1.10 0.75	71	452	205	_ 27 × 25 × 41 (686 × 635 × 1041)
L11	15	11	110 145 190	7.5 10.0 13.0	66.0 56.8 46.6	1.87 1.61 1.32	100 125 190	6.9 8.6 13.0	63.1 57.9 44.1	1.79 1.64 1.25		483	219	
L15	20	15	110 145 190	7.5 10.0 13.0	95.3 79.8 63.5	2.70 2.26 1.80	100 125 190	6.9 8.6 13.0	89.4 83.4 63.1	2.53 2.36 1.79	73	739	39 335	- 31 × 28 × 47 (787 × 711 × 1194) -
L18	25	18	110 145 190	7.5 10.0 13.0	114.7 96.7 82.6	3.25 2.74 2.34	100 125 190	6.9 8.6 13.0	110.9 101.9 80.2	3.14 2.89 2.27	74	796	361	
L22	30	22	110 145 190	7.5 10.0 13.0	128.8 113.3 92.1	3.65 3.21 2.61	100 125 190	6.9 8.6 13.0	125.8 116.5 92.0	3.56 3.30 2.61		810	367	
L23	30	22	110 145 190	7.5 10.0 13.0	146.8 121.8 105.2	4.16 3.45 2.98	100 125 190	6.9 8.6 13.0	148.7 129.6 106.5	4.21 3.67 3.02	68	1433	650	53 × 35 × 64 (1346 × 889 × 1626
L26	35	26	110 145 190	7.5 10.0 13.0	170.9 145.8 121.4	4.84 4.13 3.44	100 125 190	6.9 8.6 13.0	172.8 148.1 128.5	4.90 4.20 3.64	69 71	1493	677	
L29	40	30	110 145 190	7.5 10.0 13.0	194.9 169.8 145.4	5.52 4.81 4.12	100 125 190	6.9 8.6 13.0	193.1 176.6 147.4	5.47 5.00 4.18		1501	681	
L30	40	30	110 145 190	7.5 10 13	203.0 176.9 150.7	5.75 5.01 4.27	100 125 190	6.9 8.6 13.0	196.9 181.1 148.9	5.58 5.13 4.22	69	2035	923	
L37	50	37	110 145 190	7.5 10 13	247.1 217.8 187.1	7.00 6.17 5.30	100 125 190	6.9 8.6 13.0	233.7 218.6 179.5	6.62 6.19 5.08	70	2130	966	
L45	60	45	110 145 190	7.5 10 13	282.4 247.1 215.7	8.00 7.00 6.11	100 125 190	6.9 8.6 13.0	269.4 251.9 207.0	7.63 7.14 5.86		2178	988	
L55	75	55	110 145 190	7.5 10 13	377.4 335.7 290.9	10.69 9.51 8.24	100 125 190	6.9 8.6 13.0	381.3 351.1 289.9	10.80 9.95 8.21	73	3803 1725	1725	85 × 48 × 78 (2159 × 1219 × 198)
L75	100	75	110 145 190	7.5 10 13	485.0 439.1 368.2	13.74 12.44 10.43	100 125 190	6.9 8.6 13.0	475.4 444.5 371.5	13.47 12.59 10.52	75	3891	1765	
L90	125	90	110 145 190	7.5 10.0 13.0	616.0 546.1 474.8	17.45 15.47 13.45	100 125 190	6.9 8.6 13.0	628.9 574.2 472.2	17.82 16.27 13.38	75	5551	2518	
L110	150	110	110 145 190	7.5 10.0 13.0	733.2 657.6 572.2	20.77 18.63 16.21	100 125 190	6.9 8.6 13.0	729.1 684.2 569.8	20.65 19.38 16.14	77 78	5860	2658	
L132	180	132	110 145 190	7.5 10.0 13.0	807.3 750.8 656.2	22.87 21.27 18.59	100 125 190	6.9 8.6 13.0	800.1 753.3 648.3	22.67 21.34 18.37		6124	2778	
L160	215	160	110 145 190	7.5 10.0 13.0	1131.0 995.5 844.0	32.04 28.20 23.91	100 125 190	6.9 8.6 13.0	1118.8 1031.3 811.4	31.68 29.20 22.98	78	9229	4186	
L200	270	200	110 145 190	7.5 10.0 13.0	1384.8 1230.2 1037.1	39.23 34.85 29.38	100 125 190	6.9 8.6 13.0	1326.6 1255.7 1000.1	37.56 35.56 28.32	79 80 81	9733	4415	115 × 82 × 86 (2921 × 2083 × 2184
L250	335	250	110 145 190	7.5 10.0 13.0	1483.7 1306.5 1152.2	42.03 37.01 32.64	100 125 190	6.9 8.6 13.0	1451.6 1385.8 1149.2	41.10 39.24 32.54		10196	4625	
L290	400	290	110 145 190	7.5 10.0 13.0	1662.6 1466.0 1286.3	47.10 41.53 36.44	100 125 190	6.9 8.6 13.0	1601.7 1532.7 1231.9	45.35 43.40 34.88		10251	4650	

1) Data measured and stated in accordance with ISO1217, Ed. 4, Annex C & Annex E at the following conditions: Air Intake Pressure 1 bar A, Air Intake Temperature 20° C, Humidity 0% (Dry)
2) Measured in free field conditions in accordance with ISO 2151, tolerance +/- 3 dB

The leader in every market we serve by continuously improving all business processes with a focus on innovation and velocity

AIR



Gardner Denver, Inc.

1800 Gardner Expressway Quincy, IL 62305 866-440-6241 www.gardnerdenver.com/gdproducts

©2016 Gardner Denver, Inc. Printed in U.S.A. GS-L04-L290 1st Ed. 8/16 Supersedes GS-L07-L22 2nd Ed. 4/15, GS-L23-L29 1st Ed. 4/15, GS-L30-L132 3rd Ed. 3/15



Please recycle after use.

